

SOL 2030 Wall Mirror - Specification Sheet

Features

- Dimmable LED task lighting
- Integrated touch sensor control with memory
- Energy efficient LED lighting 5000K
- 2600 Lumens
- CRI 90+
- Integrated Defogger

Construction

- Quality polished edge mirror
- Single phase wire installation, silver backed, copper free
- Construction for surface mounting
- Includes installation hardware

Codes/Standards Applicable


- Conforms to UL Std. 962
- Cert. to CSA Std. C22.2 No.250.0-08
- ETL Intertek 5004931

Electrical System

- 120Vac, 60Hz, 37.4W
- Electric Current: 0.34A
- Wattage: 37.4W

Model


- SOL 2030

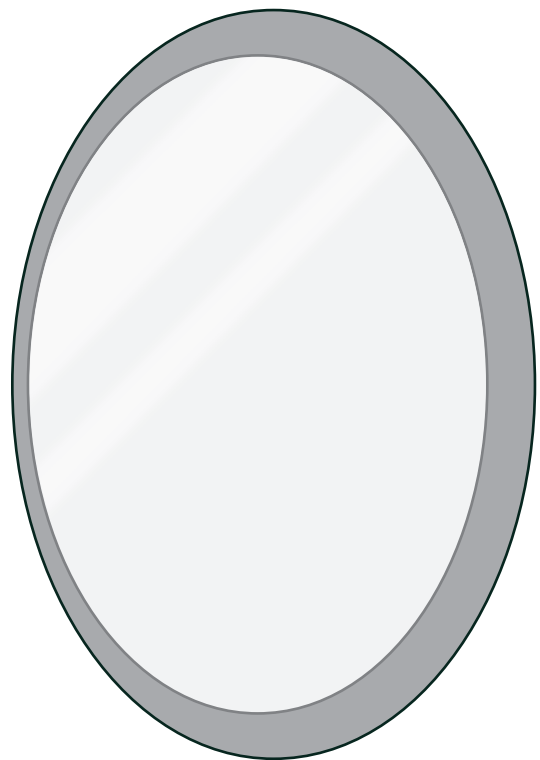

SOL2030 Wall Mirror - Specification Sheet

Dimensions

- Height: 30"
- Width: 20"
- Depth: 1-11/16"

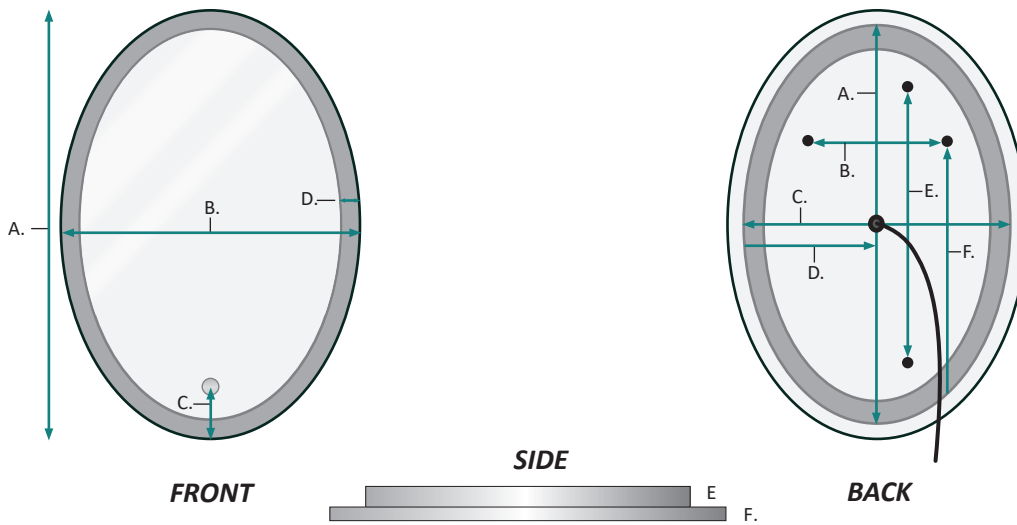

FRONT & SIDE

MODEL	A	B	C	D	E	F
SOL2030	30	20	4-1/2	1-1/4	1-3/8	3/16

BACK

MODEL	A	B	C	D	E	F
SOL2030	26-1/2	11-3/4	16-3/4	8-1/4	21-1/2	13-1/2