

Features

- · Dimmable LED task lighting
- · Integrated touch sensor control with memory
- Energy efficient LED lighting 5000K
- 3100 Lumens
- CRI 90+
- Integrated Defogger

Construction

- · Quality polished edge mirror
- · Single phase wire installation
- 5 MM Silver Backed Copper Free
- Installation Either Surface Mount (Side Mirror Trim Panels included) or Recessed
- · Includes installation hardware

Codes/Standards Applicable


- Conforms to UL Std. 962
- Cert. to CSA Std. C22.2 No.250.0-08
- ETL Intertek 5004931

Electrical System

- 120Vac, 60Hz, 53W
- Electric Current: 0.44A
- Wattage: 53W

Model

- SVANGE 2436R Right Swinging Door
- Included models in this configuration: Cabinet 1 = 2436R

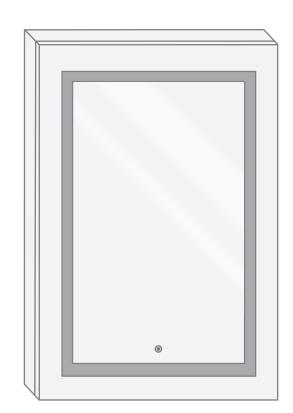

Outlet


- Performance Requirements: Contains the required Supervisory Circuit with the Auto-Monitoring Function as noted by UL 1310
- Input Voltage: Min 112Vac, Nom 125Vac, Max 137Vac
- Frequency: 60Hz
- Front Receptacle Current: 102-132VAC Nominal 15A
- USB Output Current: 5VDC Nominal 4A



CABINET CONFIGURATION


• Included models in this configuration: Cabinet 1 = 2436R



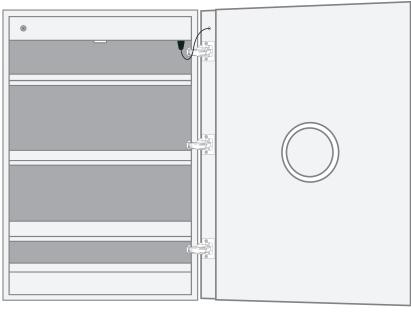






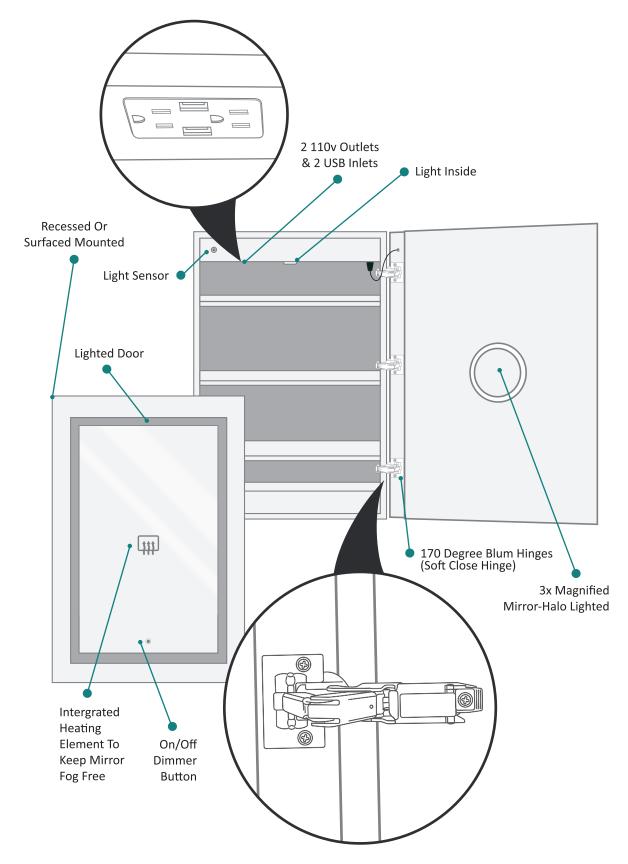



SURFACE MOUNT

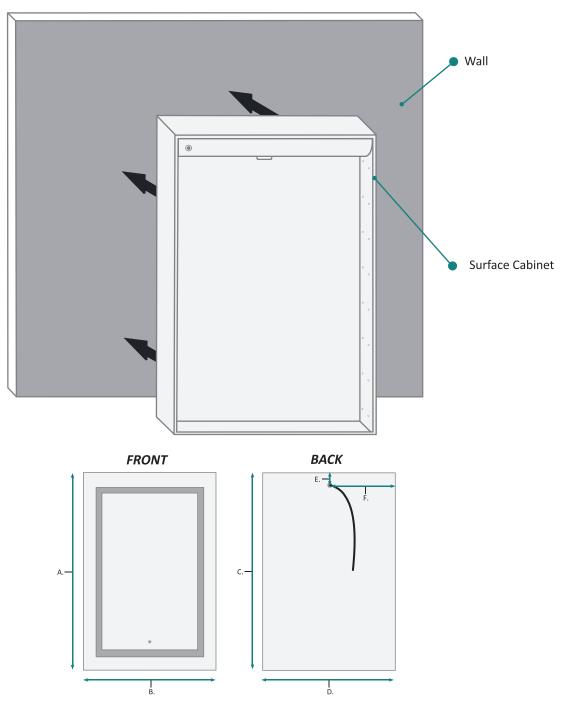


FRONT & BACKS

MODEL	А	В	С	D	Е	F
SVANGE2436R	36	24	36	24	1-1/8	12




RECESS MOUNT

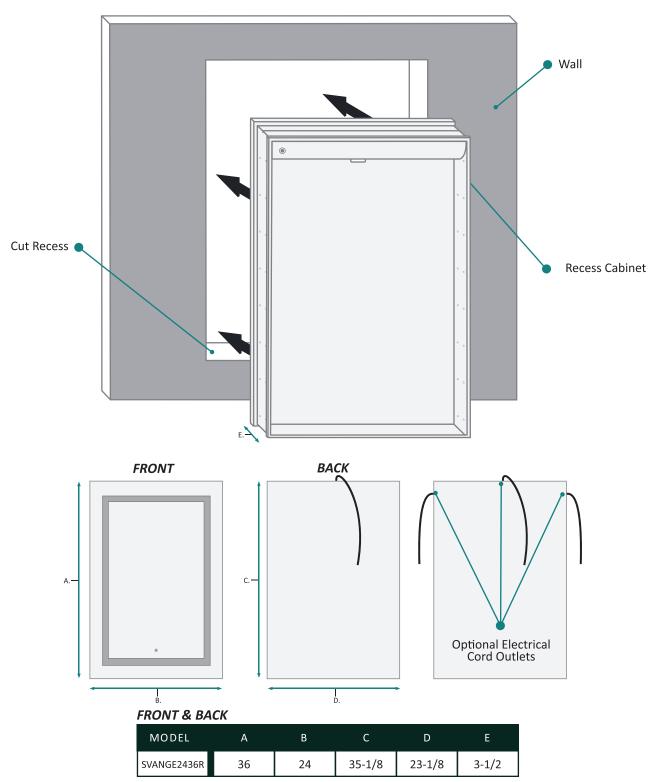




RECESS INSTALLATION OPTIONAL ELECTRICAL CORD LOCATIONS

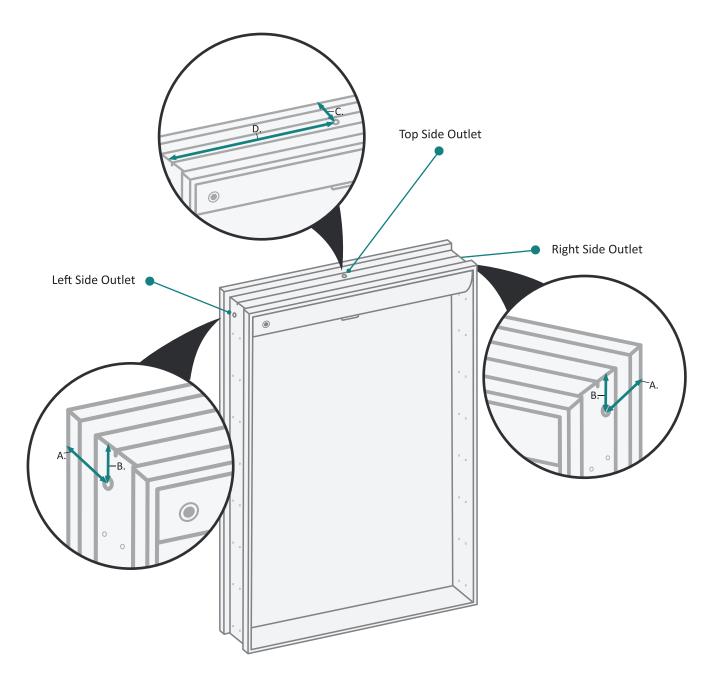


ELECTRICAL CORD LOCATIONS

MODEL	А	В	С	D
SVANGE2436R	1-1/8	1-1/8	1-1-8	12








DOOR & CABINET

MODEL	А	В	С	D	Е	F	G
SVANGE2436R	7/8	3-1/2	5	18	3/8	5-1/4	13

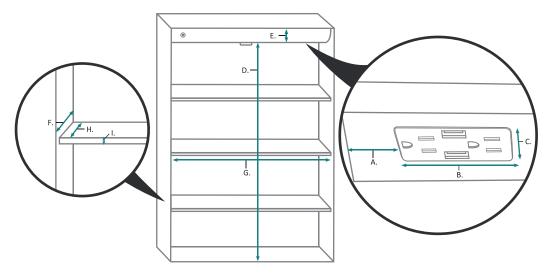

INTERIOR CABINET

MODEL	А	В	С	D	Е	F	G	Н	- 1
SVANGE2436R	3-3/4	5-5/8	1-1/4	32	2-1/4	3-5/8	22-1/4	2-3/8	3/8