SVANGE 4236L LED Medicine Cabinet - Specification Sheet



Features

- Dimmable LED task lighting
- Integrated touch sensor control with memory
- Energy efficient LED lighting 5000K
- 3100Lumens
- CRI 90+
- Integrated Defogger

Construction

- Quality polished edge mirror
- · Single phase wire installation
- 5 MM Silver Backed Copper Free
- Installation Either Surface Mount
- (Side Mirror Trim Panels included) or Recessed
- Includes installation hardware

Codes/Standards Applicable


- Conforms to UL Std. 962
- Cert. to CSA Std. C22.2 No.250.0-08
- ETL Intertek 5004931

Electrical System

- 120Vac, 60Hz, 53W
- Electric Current: 0.44A
- Wattage: 53W

Model

- SVANGE 4236L Left Swinging Door
- Included models in this configuration: Cabinet 1=1836R Cabinet 2=2436L

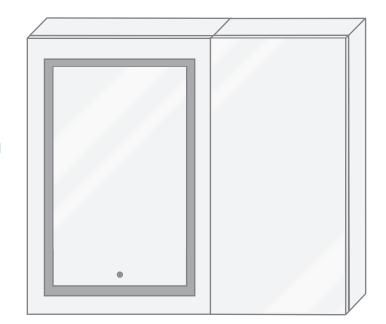


Electrical System


- Perfomance Requirments: Contains the required
- Supervisory Circiut with the Auto-Monitoring Function as noted by UL 1310
- Input Voltage: Min 112Vac, Nom 125Vac, Max 137Vac
- Frequency:60Hz
- Front Receptacle Current: 102-132Vac Nominal 15A
- USB Output Current:5VDC Nominal 4A



CABINET CONFIGURATION


 Included models in this configuration: Cabinet 1 = 1836R Cabinet 2=2436L

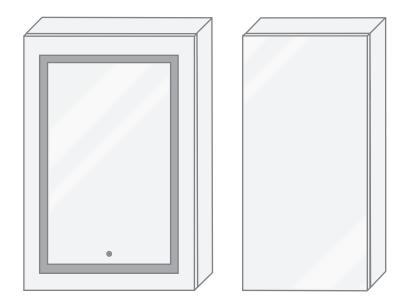

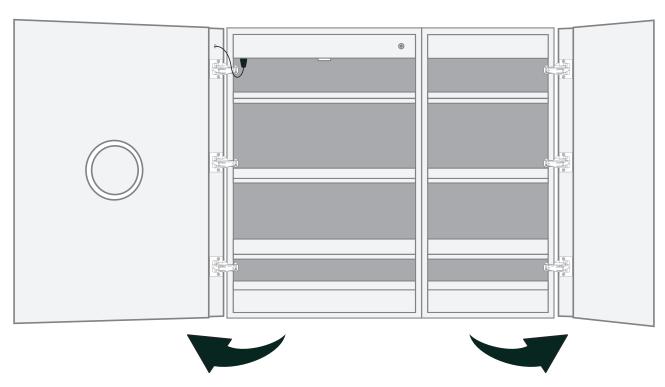






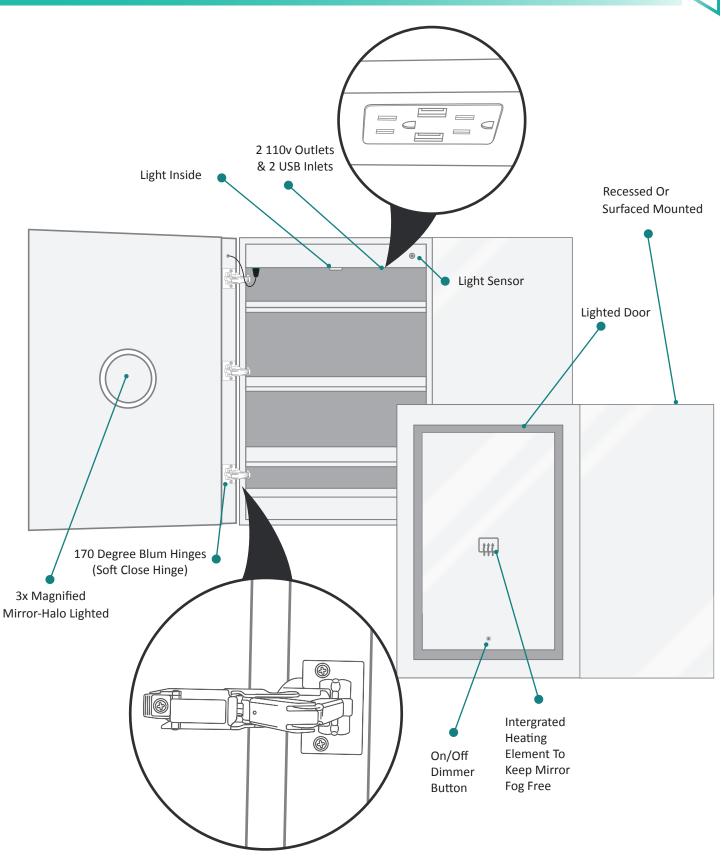





SURFACE MOUNT

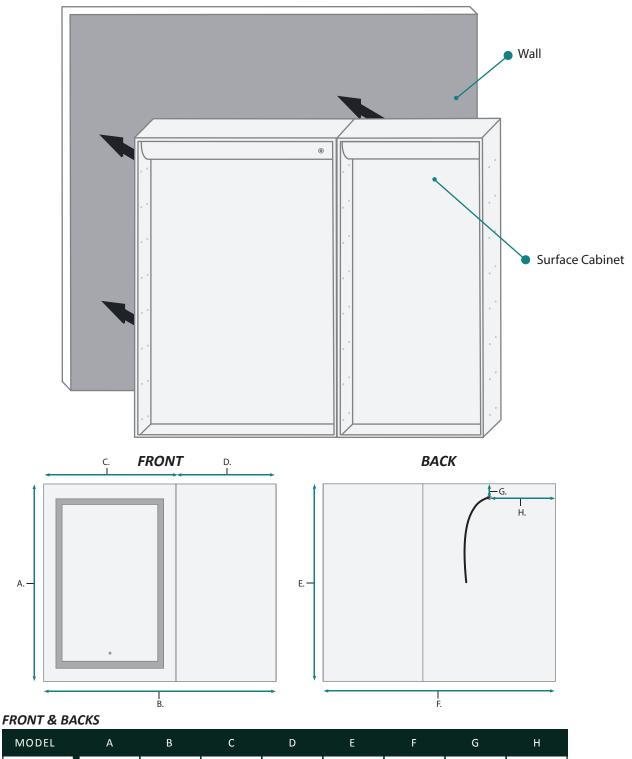


MODEL	А	В	С	D	E	F	G	н
SVANGE4236L	36	42-1/8	24	18	36	42-1/8	1-1/8	12






RECESSED MOUNT

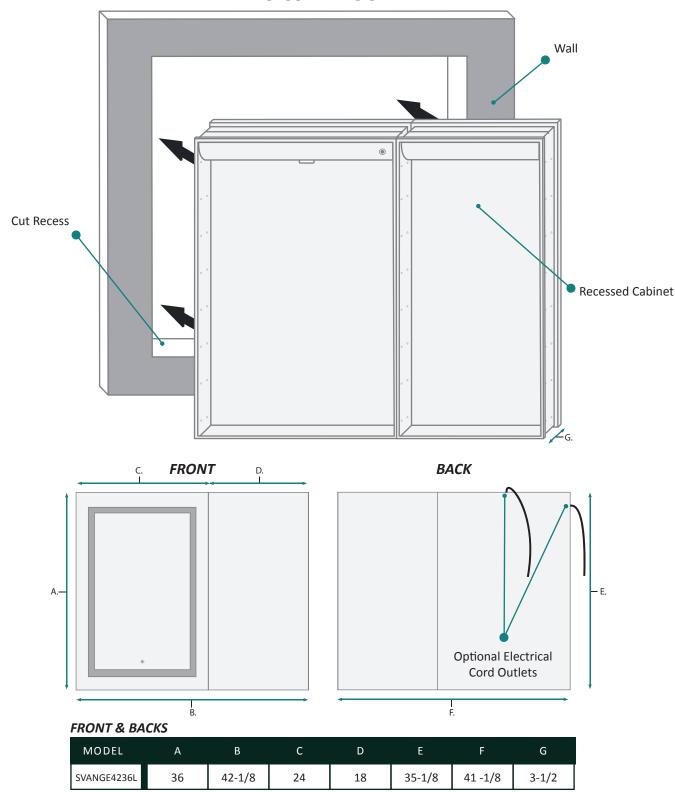



RECESS INSTALLATION OPTIONAL ELECTRICAL CORD LOCATIONS

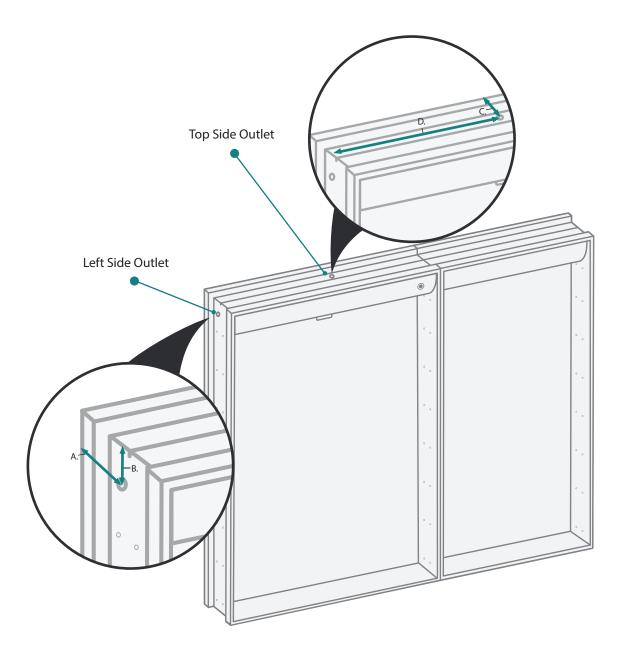



ELECTRICAL CORD LOCATIONS

MODEL	А	В	С	D
SVANGE4236L	1-1/8	1-1/8	1-1/8	12

SVANGE 4236L LED Medicine Cabinet - Specification Sheet




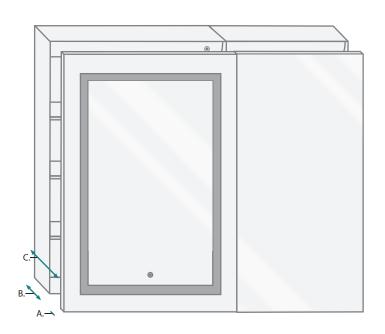



DOOR & CABINET

MODEL	А	В	С	D	Е	F	G
SVANGE4236L	7/8	3-1/2	5	18	3/8	5-1/4	13

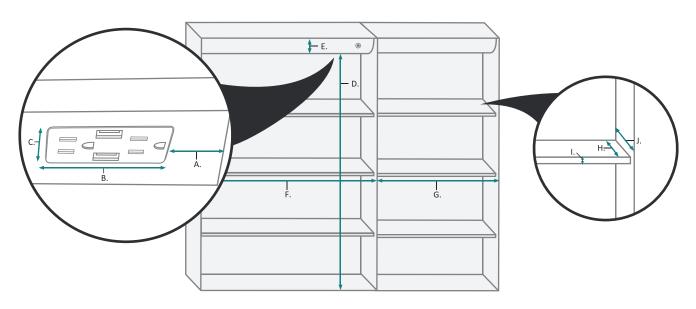

INTERIOR CABINET

MODEL	А	В	С	D	Е	F	G	Н	ı	J
SVANGE4236L	3-3/4	5-5/8	1-1/4	32	2-1/4	22-1/4	16-1/4	2-3/8	3/8	3-5/8