SVANGE 4836LLR LED Medicine Cabinet - Specification Sheet



Features

- Dimmable LED task lighting
- Integrated touch sensor control with memory
- Energy efficient LED lighting 5000K
- 3100Lumens
- CRI 90+
- Integrated Defogger

Construction

- Quality polished edge mirror
- · Single phase wire installation
- 5 MM Silver Backed Copper Free
- Installation Either Surface Mount
- (Side Mirror Trim Panels included) or Recessed
- Includes installation hardware

Codes/Standards Applicable


- Conforms to UL Std. 962
- Cert. to CSA Std. C22.2 No.250.0-08
- ETL Intertek 5004931

Electrical System

- 120Vac, 60Hz, 53W
- Electric Current: 0.44A
- Wattage: 53W

Model

- SVANGE 4836LLR Right & Left Swinging Door
- Included models in this configuration: Cabinet 1=1236L Cabinet 2=2436L Cabinet 3=1236R

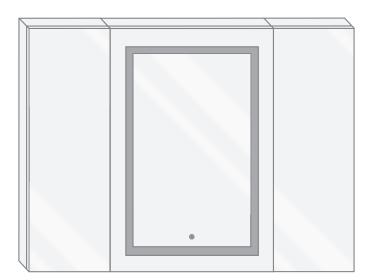


Electrical System

- Perfomance Requirments: Contains the required
- Supervisory Circiut with the Auto-Monitoring Function as noted by UL 1310
- Input Voltage: Min 112Vac, Nom 125Vac, Max 137Vac
- Frequency:60Hz
- Front Receptacle Current: 102-132Vac Nominal 15A
- USB Output Current:5VDC Nominal 4A




CABINET CONFIGURATION

• Included models in this configuration: Cabinet 1 = 2436L Cabinet 2=2436L Cabinet 2=1236R

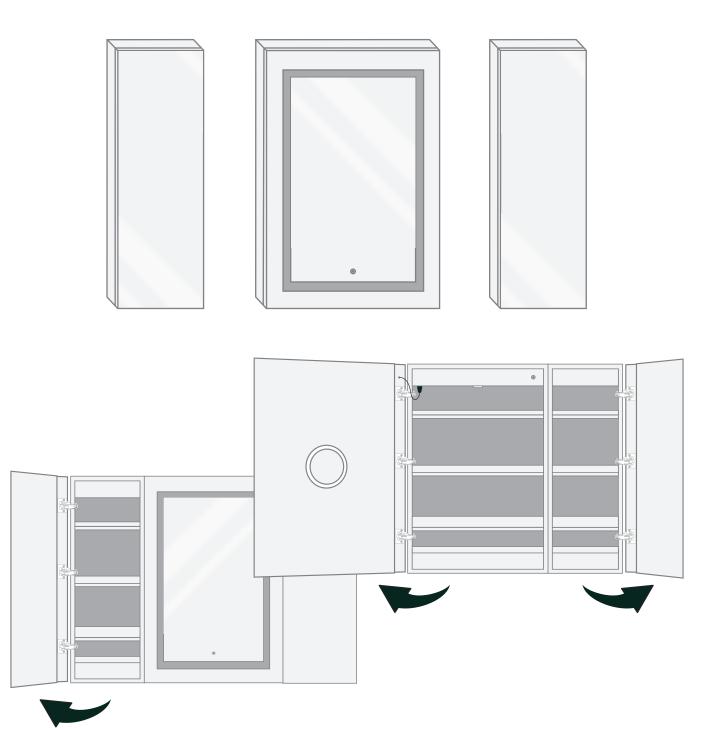




SVANGE 4836LLR LED Medicine Cabinet - Specification Sheet

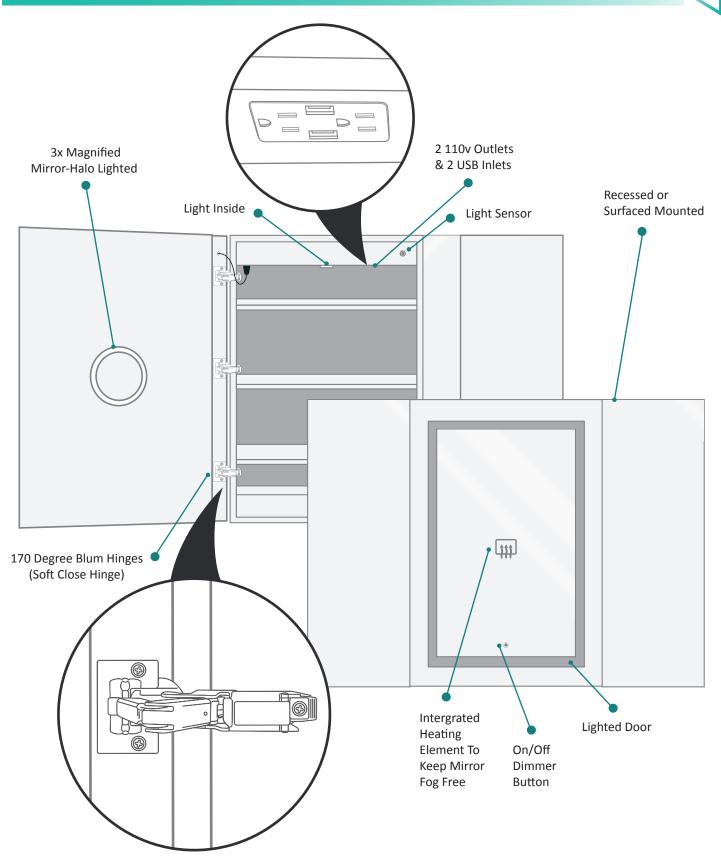






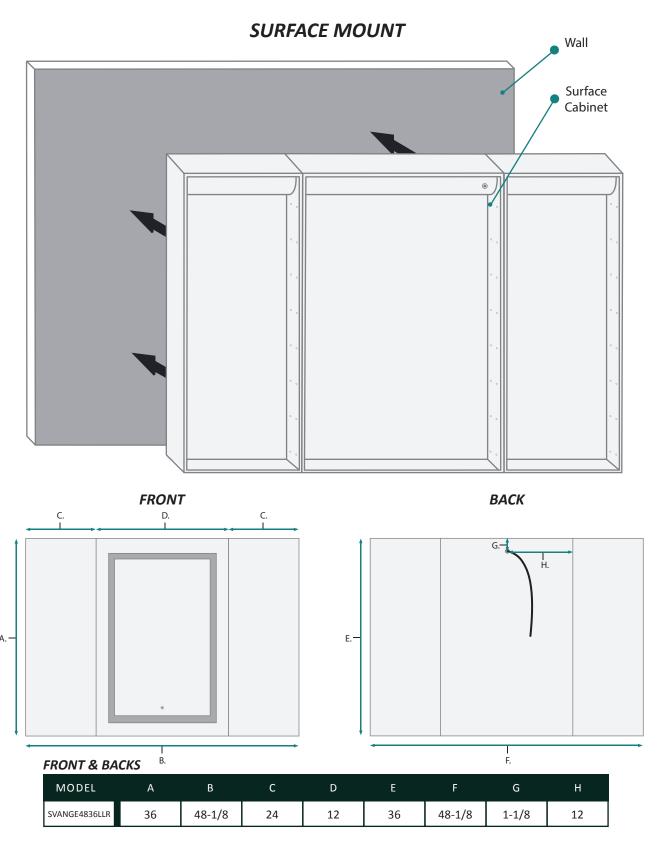




SVANGE 4836LLR LED Medicine Cabinet - Specification Sheet

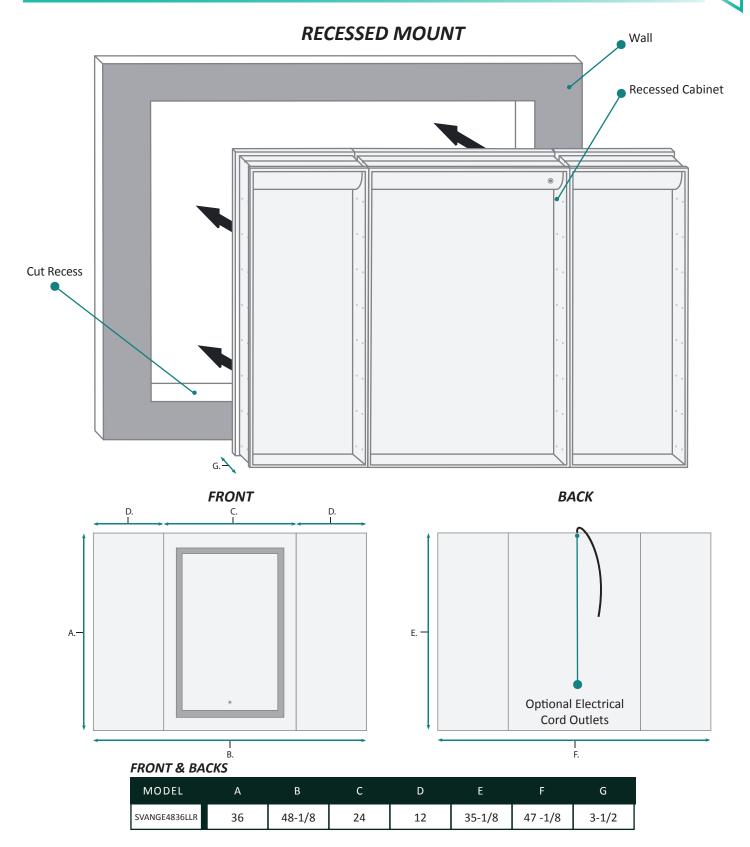



RECESS INSTALLATION OPTIONAL ELECTRICAL CORD LOCATIONS

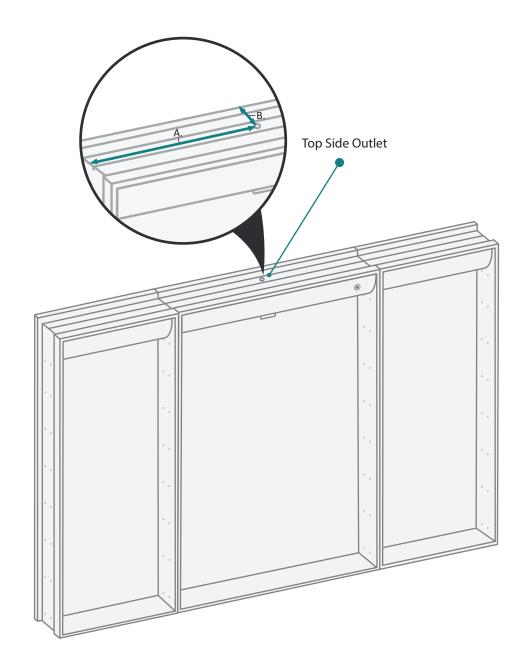



ELECTRICAL CORD LOCATIONS

MODEL	А	В		
SVANGE4836LLR	1-1/8	12		






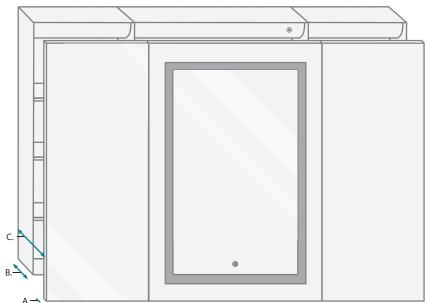



DOOR & CABINET

MODEL	А	В	С	D	Е	F	G
SVANGE4836LLR	7/8	3-1/2	5	18	3/8	5-1/4	13

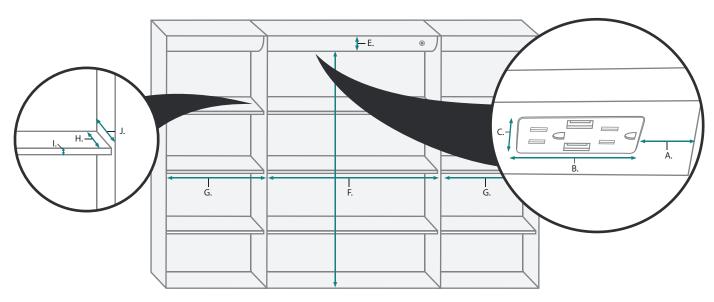

INTERIOR CABINET

MODEL	А	В	С	D	Е	F	G	Н	1	J
SVANGE4836LLR	3-3/4	5-5/8	1-1/4	32	2-1/4	22-1/4	10-1/4	2-3/8	3/8	3-5/8