SVANGE 4836D LED Medicine Cabinet - Specification Sheet



Features

- · Dimmable LED task lighting
- Integrated touch sensor control with memory
- Energy efficient LED lighting 5000K
- 3100Lumens
- CRI 90+
- Integrated Defogger

Construction

- Quality polished edge mirror
- · Single phase wire installation
- 5 MM Silver Backed Copper Free
- Installation Either Surface Mount
- (Side Mirror Trim Panels included) or Recessed
- Includes installation hardware

Codes/Standards Applicable


- Conforms to UL Std. 962
- Cert. to CSA Std. C22.2 No.250.0-08
- ETL Intertek 5004931

Electrical System

- 120Vac, 60Hz, 53W
- Electric Current: 0.44A
- Wattage: 53W

Model

- SVANGE 4836D Right & Left Swinging Door
- Included models in this configuration: Cabinet 1=2436L Cabinet 2=2436R

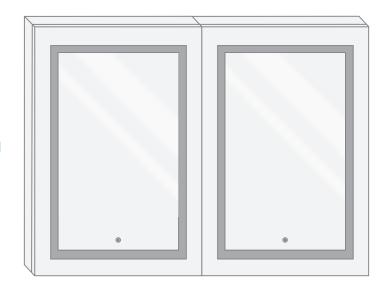

Electrical System


- Perfomance Requirments: Contains the required
- Supervisory Circiut with the Auto-Monitoring Function as noted by UL 1310
- Input Voltage: Min 112Vac, Nom 125Vac, Max 137Vac
- Frequency:60Hz
- Front Receptacle Current: 102-132Vac Nominal 15A
- USB Output Current:5VDC Nominal 4A




CABINET CONFIGURATION

• Included models in this configuration: Cabinet 1 = 2436L Cabinet 2=2436R






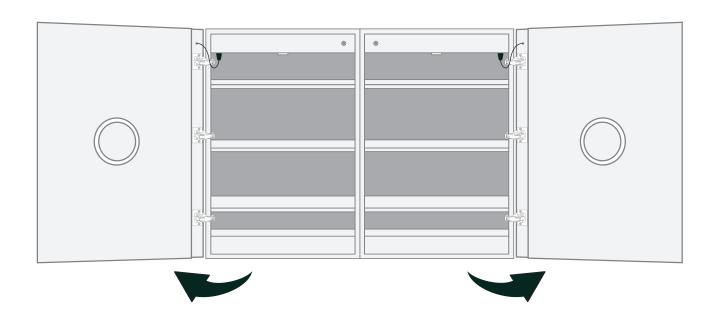






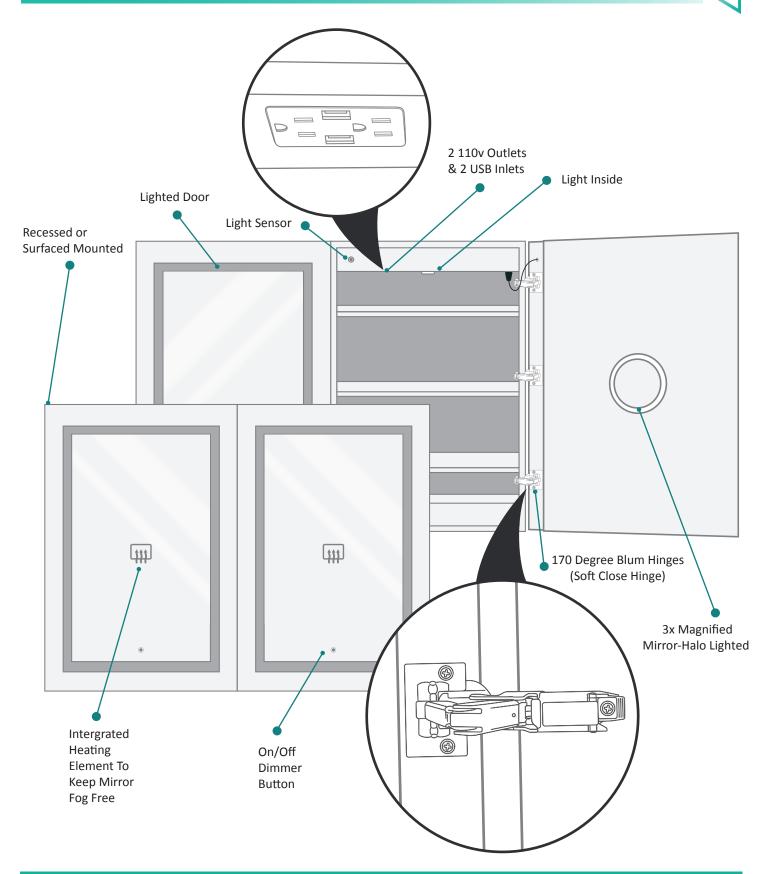






SURFACE MOUNT

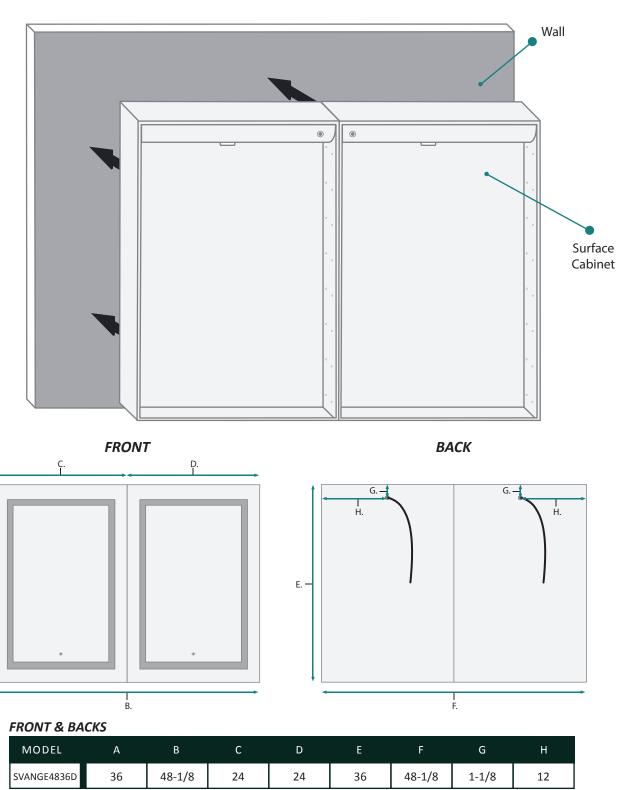






RECESSED MOUNT

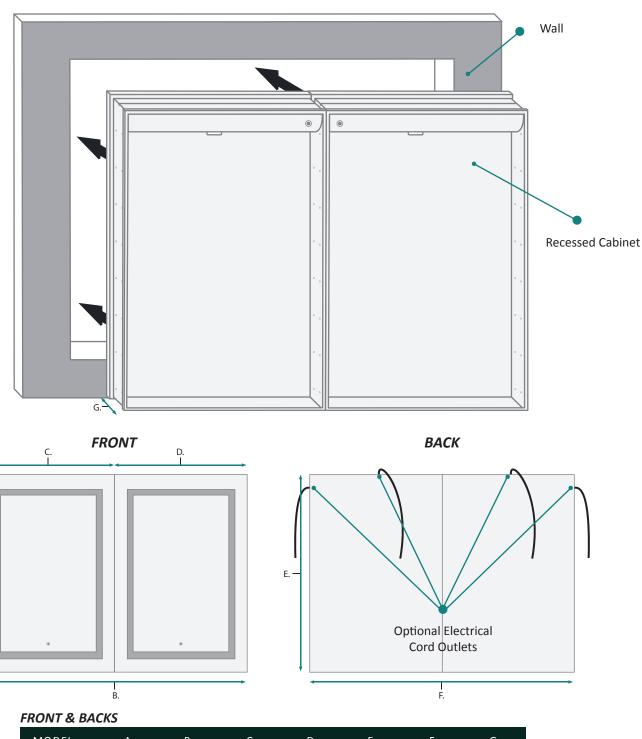

MODEL	А	В	С	D	E	F	G
SVANGE4836D	36	48-1/8	24	24	35-1/8	47 -1/8	3-1/2



RECESS INSTALLATION OPTIONAL ELECTRICAL CORD LOCATIONS

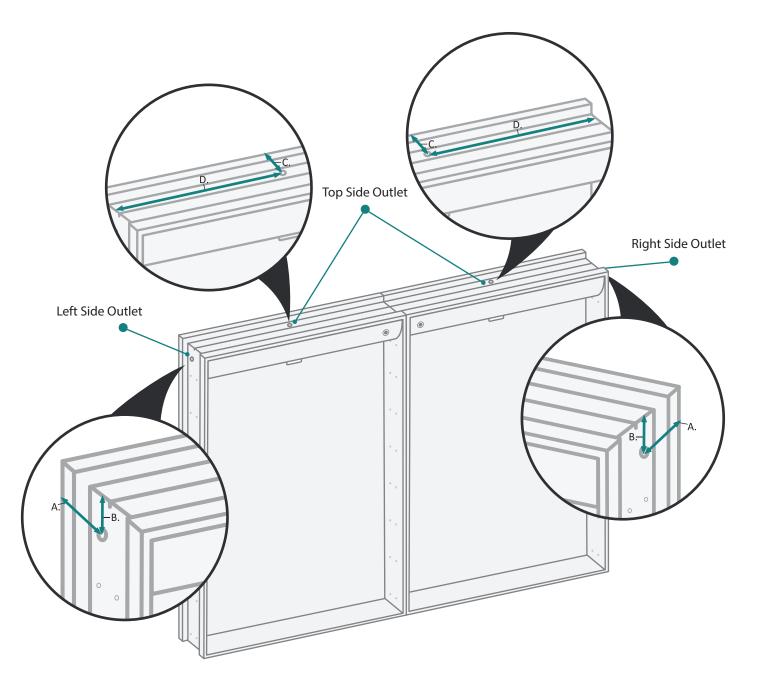



ELECTRICAL CORD LOCATIONS

MODEL	А	В	С	D
SVANGE4836D	1-1/8	1-1/8	1-1/8	12

SVANGE 4836D LED Medicine Cabinet - Specification Sheet www.kruggusa.com




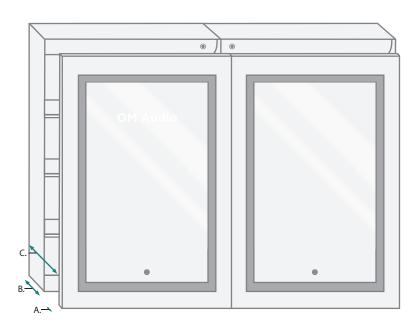



DOOR & CABINET

MODEL	А	В	С	D	E	F	G
SVANGE4836D	7/8	3-1/2	5	18	3/8	5-1/4	13

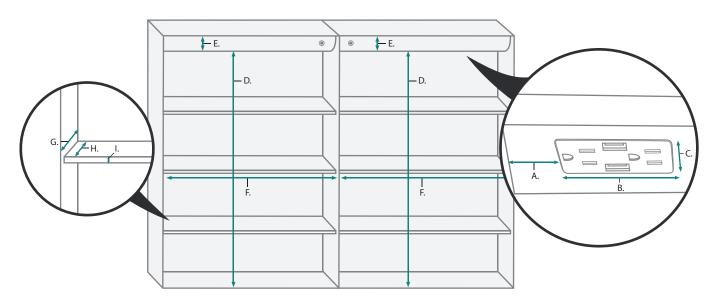

INTERIOR CABINET

MODEL	А	В	С	D	E	F	G	Н	I
SVANGE4836D	3-3/4	5-5/8	1-1/4	32	2-1/4	22-1/4	3-5/8	2-3/8	3/8