SVANGE 4242R LED Medicine Cabinet - Specification Sheet



Features

- Dimmable LED task lighting
- Integrated touch sensor control with memory
- Energy efficient LED lighting 5000K
- 4100 Lumens
- CRI 90+
- Integrated Defogger

Construction

- Quality polished edge mirror
- · Single phase wire installation
- 5 MM Silver Backed Copper Free
- Installation Either Surface Mount
- (Side Mirror Trim Panels included) or Recessed
- Includes installation hardware

Codes/Standards Applicable

- Conforms to UL Std. 962
- Cert. to CSA Std. C22.2 No.250.0-08
- ETL Intertek 5004931

Electrical System

- 120Vac, 60Hz, 55W
- Electric Current: 0.45A
- Wattage: 55W

Model

- SVANGE 4242R Right Swinging Door
- Included models in this configuration: Cabinet 1=1842L Cabinet 2=2442R

Electrical System

- Perfomance Requirments: Contains the required
- Supervisory Circiut with the Auto-Monitoring Function as noted by UL 1310
- Input Voltage: Min 112Vac, Nom 125Vac, Max 137Vac
- Frequency:60Hz
- Front Receptacle Current: 102-132Vac Nominal 15A
- USB Output Current:5VDC Nominal 4A

SKU


- Name: SVANGE 4242R
- Height: 42"
- Width: 42"
- Weight: 119lbs
- Shipping weight: 123lbs




CABINET CONFIGURATION

 Included models in this configuration: Cabinet 1 = 1842L Cabinet 2=2442R






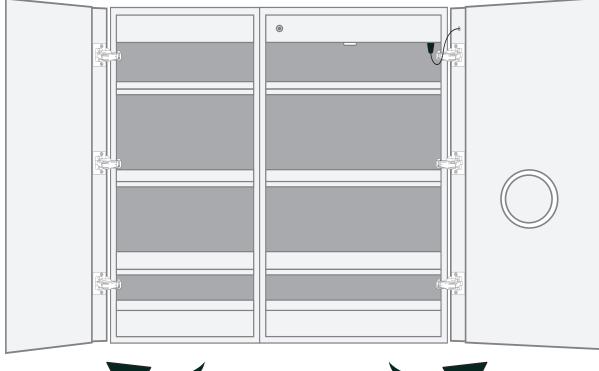






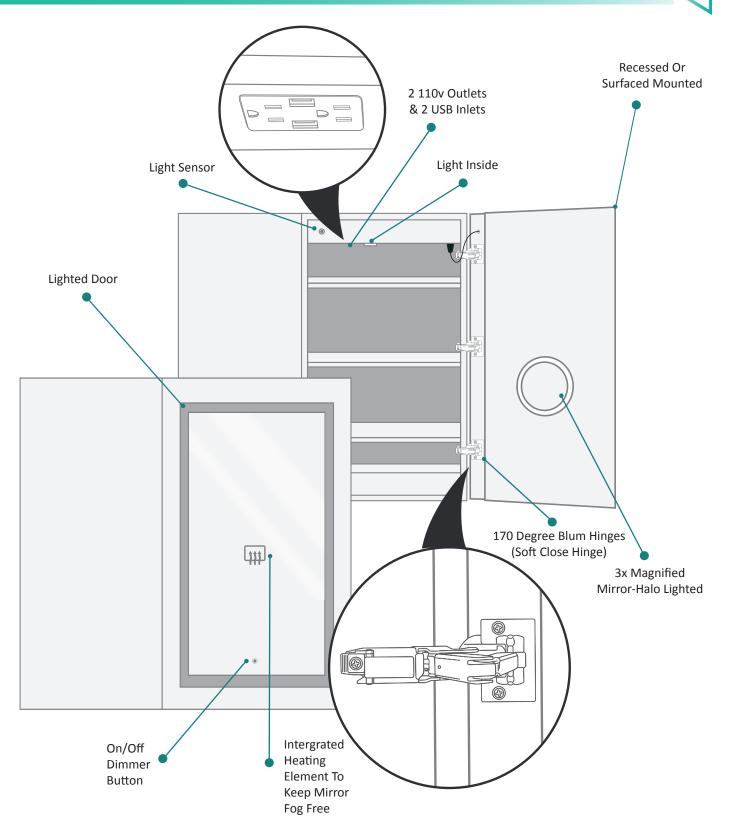






SURFACE MOUNT

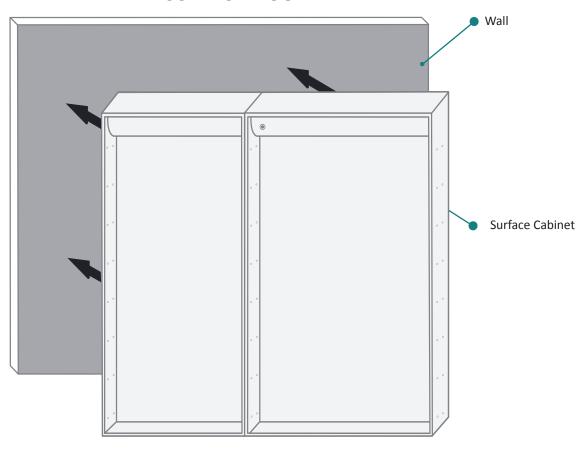

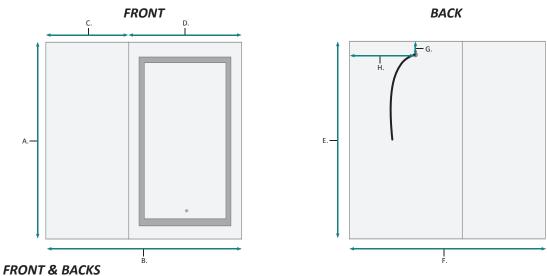


 MODEL
 A
 B
 C
 D
 E
 F
 G
 H

 SVANGE4242R
 42
 42
 18
 24
 42
 42
 1-1/8
 11-1/4






RECESSED MOUNT

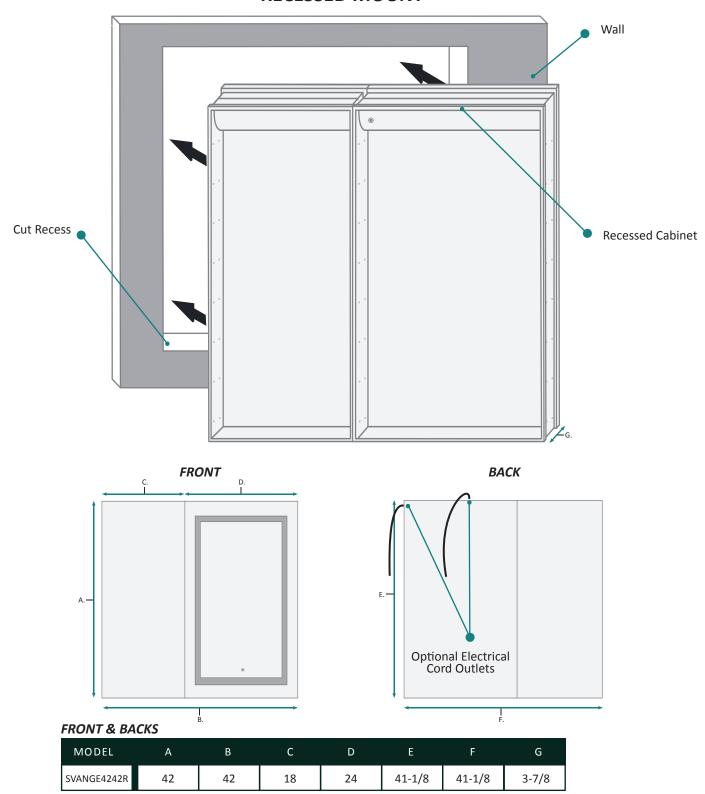



RECESS INSTALLATION OPTIONAL ELECTRICAL CORD LOCATIONS

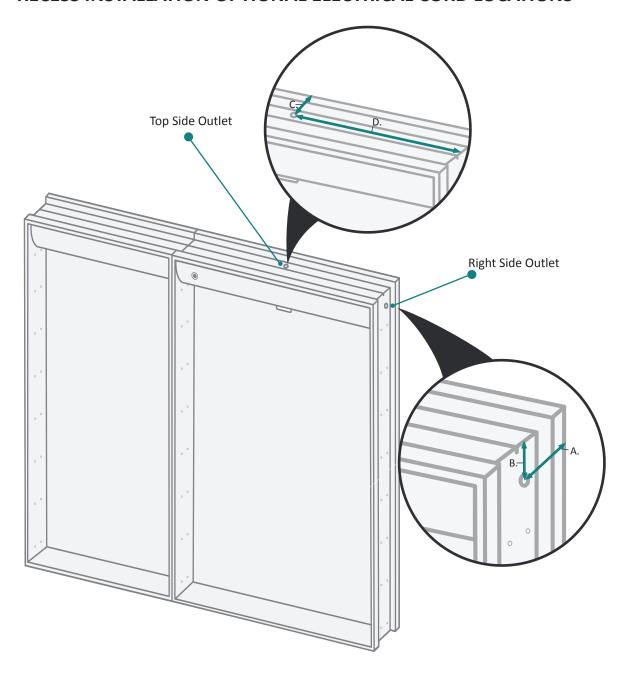



ELECTRICAL CORD LOCATIONS

MODEL	MODEL A		С	D	
SVANGE4242R	1-1/2	1-1/8	1-3/8	11-1/4	

SVANGE 4242R LED Medicine Cabinet - Specification Sheet www.kruggusa.com








DOOR & CABINET

MODEL	А	В	С	D	Е	F	G
SVANGE4242R	7/8	3-7/8	4-3/4	18	3/8	5-1/4	11-1/4

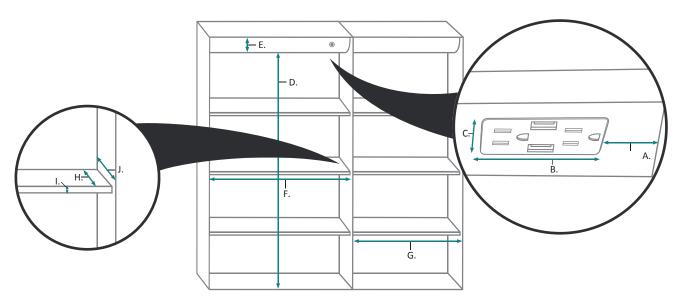

INTERIOR CABINET

MODEL	А	В	С	D	Е	F	G	Н	1	J
SVANGE4242R	3-3/4	5-5/8	1-1/4	38-1/4	2-1/4	22-1/2	16-1/2	2-3/8	3/8	3-5/8