SVANGE 8442DLLRR LED Medicine Cabinet - Specification Sheet www.kruggi



Features

- Dimmable LED task lighting
- Integrated touch sensor control with memory
- Energy efficient LED lighting 5000K
- 3250 Lumens
- CRI 90+
- Integrated Defogger

Construction

- Quality polished edge mirror
- · Single phase wire installation
- 5 MM Silver Backed Copper Free
- Installation Either Surface Mount
- (Side Mirror Trim Panels included) or Recessed
- Includes installation hardware



Codes/Standards Applicable

- Conforms to UL Std. 962
- Cert. to CSA Std. C22.2 No.250.0-08
- ETL Intertek 5004931

Electrical System

Requirements for each cabinets:

- 120Vac, 60Hz, 55W
- Electric Current: 0.46A
- Wattage: 55W

Model

- SVANGE 8442DLLRR Swinging Doors
- Included models in this configuration: Cabinet 1=2442L Cabinet 2=1842L Cabinet 3=1842R Cabinet 4=2442R

Electrical System

- Perfomance Requirments: Contains the required
- Supervisory Circiut with the Auto-Monitoring Function as noted by UL 1310
- Input Voltage: Min 112Vac, Nom 125Vac, Max 137Vac
- Frequency:60Hz
- Front Receptacle Current: 102-132Vac Nominal 15A
- USB Output Current:5VDC Nominal 4A


SKU


- Name: SVANGE 8442DLLRR
- Height: 42"
- Width: 84"
- Weight: 239lbs
- Shipping weight: 243lbs



CABINET CONFIGURATION


• Included models in this configuration:

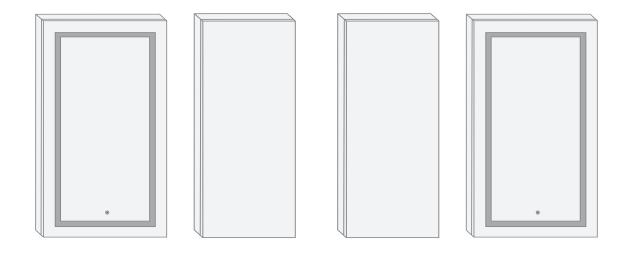

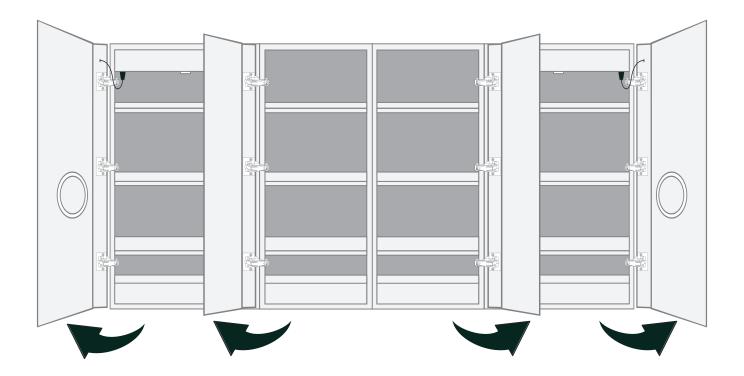






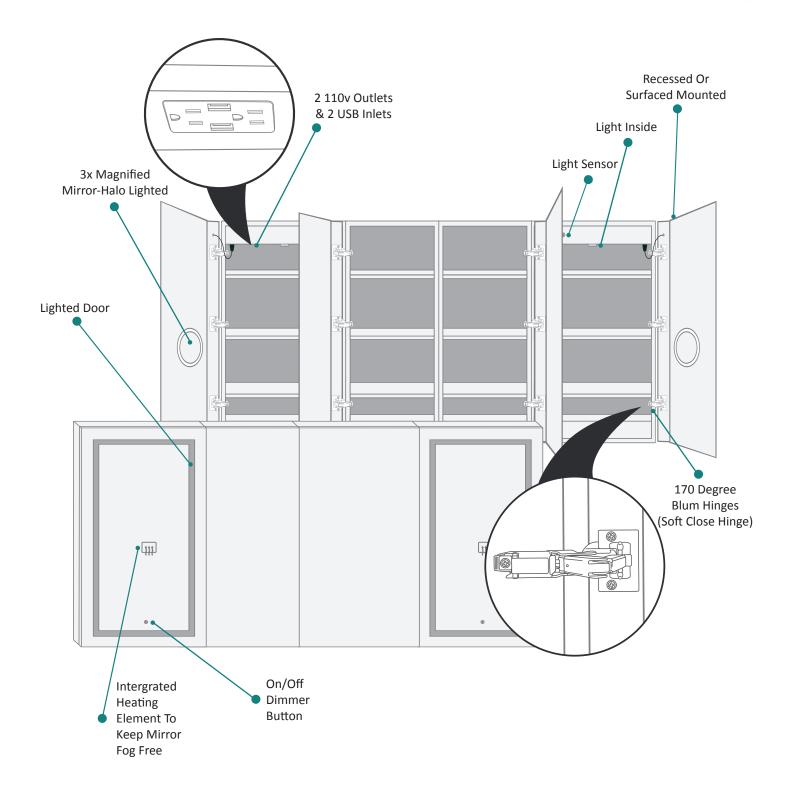






SURFACE MOUNT

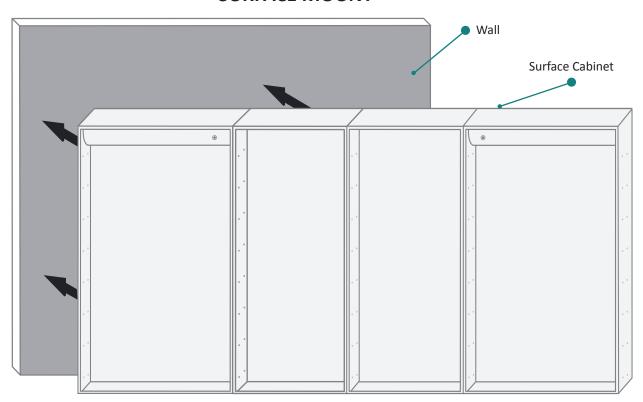

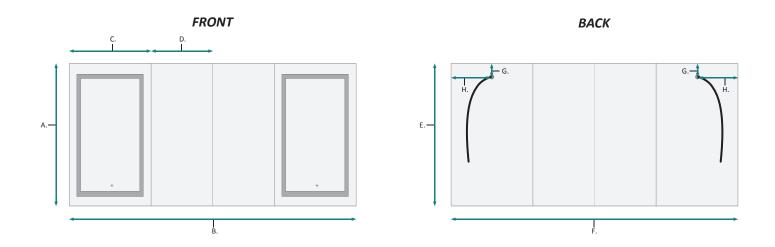



FRONT & BACKS

MODEL	А	В	С	D	Е	F	G	Н
SVANGE8442DLLRR	42	84	24	18	42	84	1-1/8	11-1/4



RECESSED MOUNT

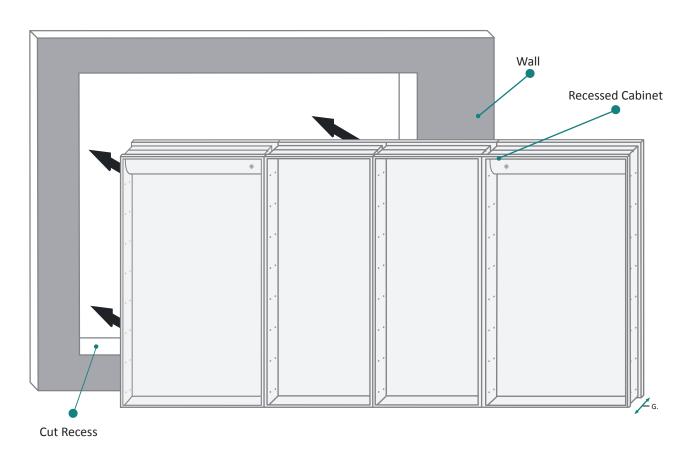

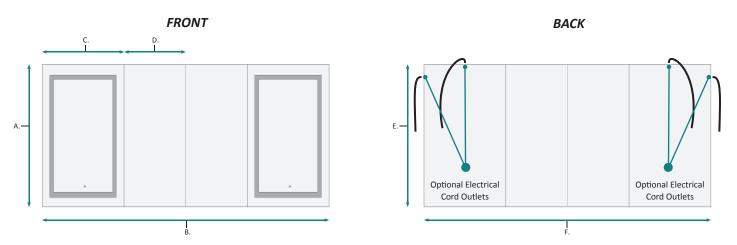


FRONT & BACKS

MODEL	А	В	С	D	E	F	G
SVANGE8442DLLRR	42	84	24	18	41-1/8	83-1/8	3-7/8



RECESS INSTALLATION OPTIONAL ELECTRICAL CORD LOCATIONS

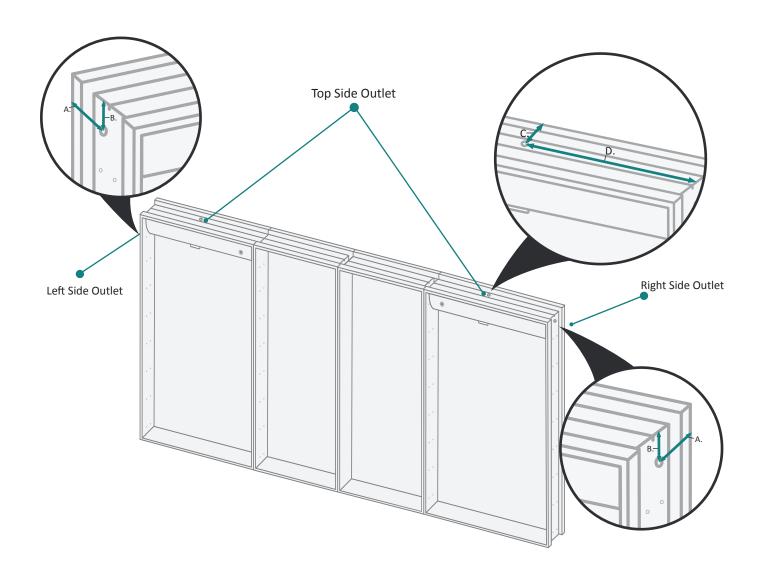


ELECTRICAL CORD LOCATIONS

MODEL	А	В	С	D
SVANGE8442DLLRR	1-1/2	1-1/8	1-3/8	11-1/4






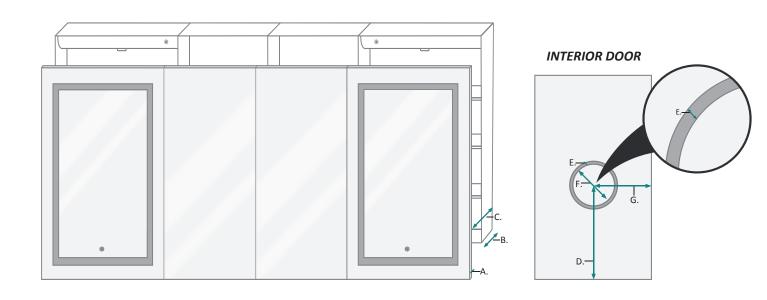

DOOR & CABINET

MODEL	А	В	С	D	Е	F	G
SVANGE8442DLLRR	7/8	3-7/8	4-3/4	18	3/8	5-1/4	11-1/4

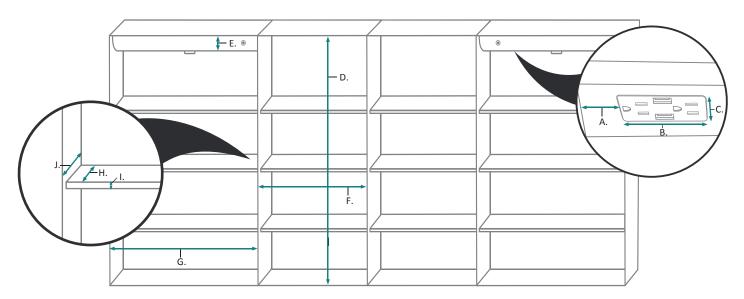

INTERIOR CABINET

MODEL	А	В	С	D	Е	F	G	Н	1	J
SVANGE8442DLLRR	3-3/4	5-5/8	1-1/4	40-1/2	2-1/4	16-1/2	22-1/2	2-3/8	3/8	3-5/8