


Features

- Dimmable LED task lighting
- Integrated touch sensor control with memory
- Energy efficient LED lighting 5000K
- 3250 Lumens
- CRI 90+
- Integrated Defogger

Construction

- Quality polished edge mirror
- · Single phase wire installation
- 5 MM Silver Backed Copper Free
- Installation Either Surface Mount
- · (Side Mirror Trim Panels included) or Recessed
- · Includes installation hardware

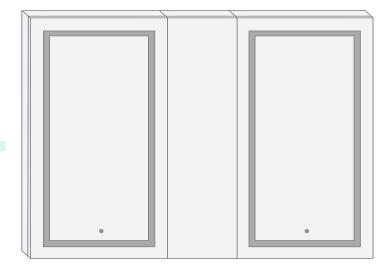

Codes/Standards Applicable

- Conforms to UL Std. 962
- Cert. to CSA Std. C22.2 No.250.0-08
- ETL Intertek 5004931

Electrical System

Requirements for each cabinets:

- 120Vac, 60Hz, 55W
- Electric Current: 0.46A
- Wattage: 55W

Model

- SVANGE 6042DLRR Swinging Doors
- Included models in this configuration: Cabinet 1=2442L Cabinet 2=2442R Cabinet 3=1242R

Electrical System

- Perfomance Requirments: Contains the required
- Supervisory Circiut with the Auto-Monitoring Function as noted by UL 1310
- Input Voltage: Min 112Vac, Nom 125Vac, Max 137Vac
- Frequency:60Hz
- Front Receptacle Current: 102-132Vac Nominal 15A
- USB Output Current:5VDC Nominal 4A


SKU


- Name: SVANGE 6042DLRR
- Height: 42"
- Width: 60"
- Weight: 108lbs
- Shipping weight: 112lbs





CABINET CONFIGURATION

 Included models in this configuration: Cabinet 1 = 2442L Cabinet 2=2442R Cabinet 3=1242R








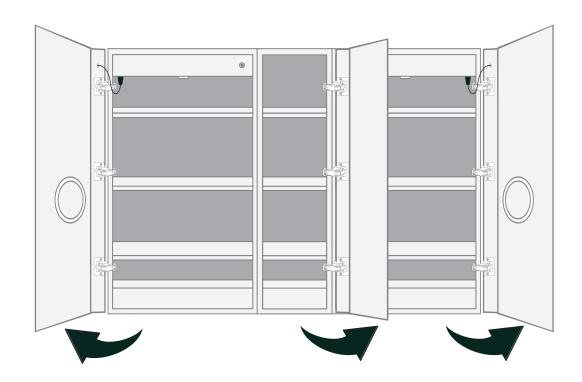




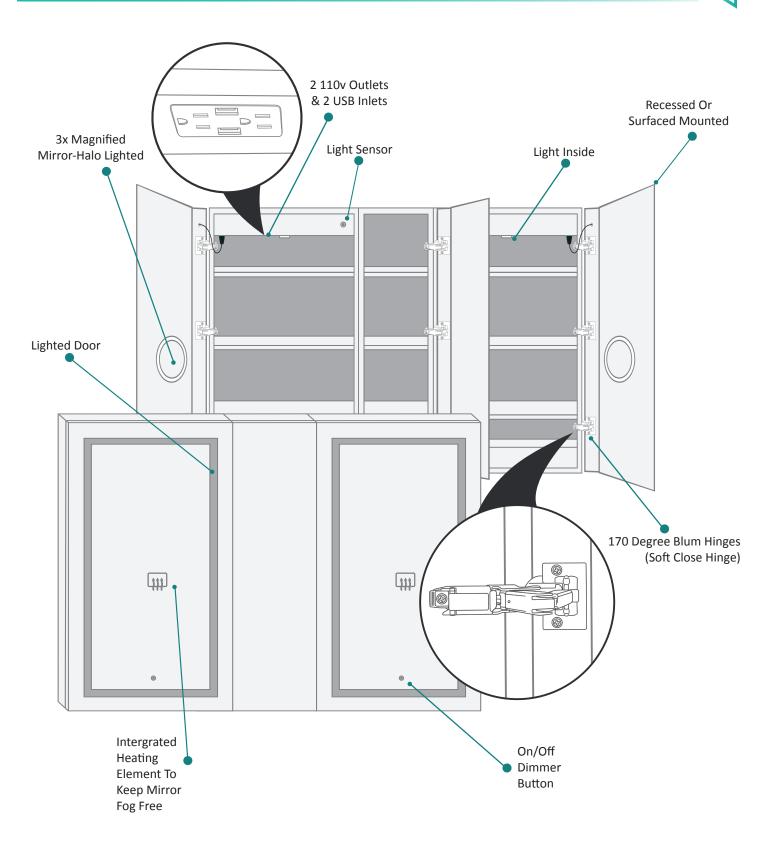




Kruge www.kruggusa.com

SURFACE MOUNT

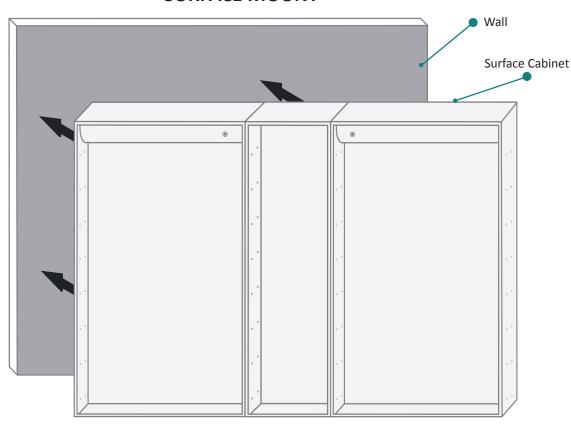

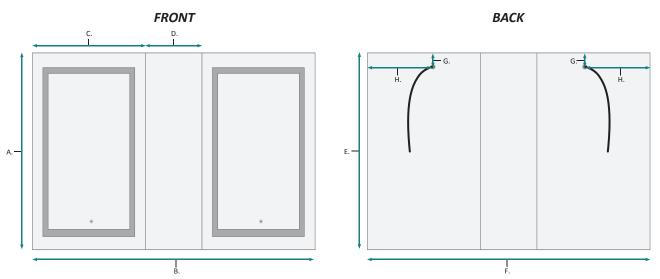


FRONT & BACKS


MODEL	А	В	С	D	E	F	G	н
SVANGE6042DLRR	42	60	24	12	42	60	1-1/8	11-1/4





RECESSED MOUNT

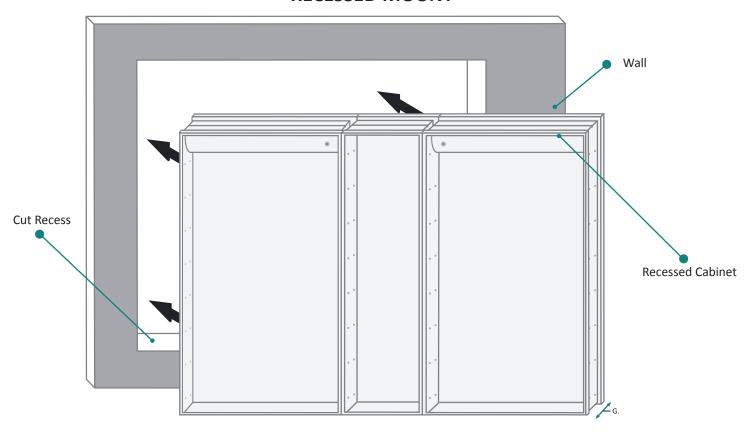

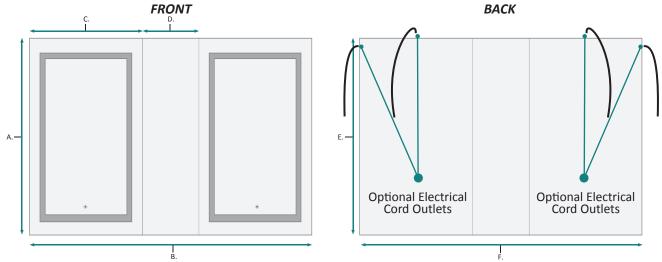


FRONT & BACKS

MODEL	А	В	С	D	E	F	G
SVANGE6042DLRR	42	60	24	12	41-1/8	59-1/8	3-7/8




RECESS INSTALLATION OPTIONAL ELECTRICAL CORD LOCATIONS

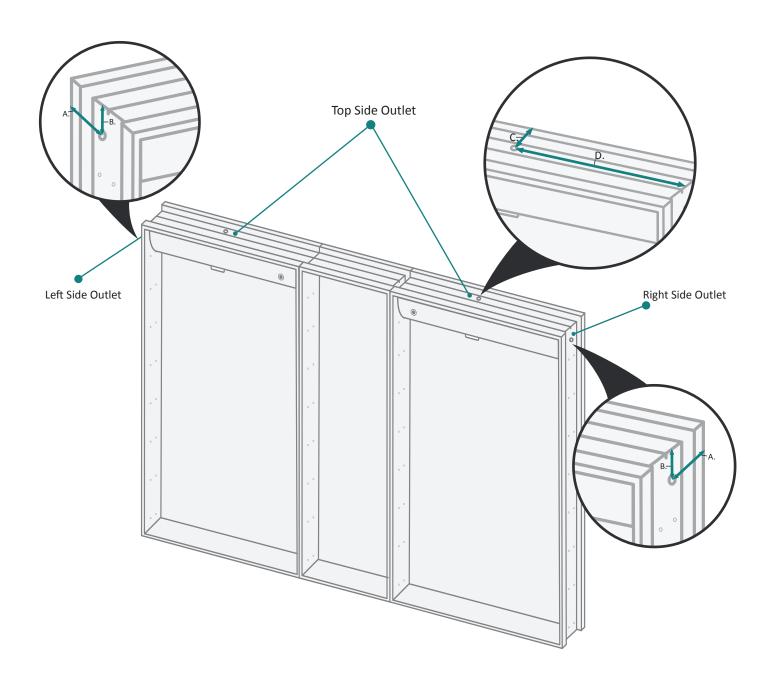


ELECTRICAL CORD LOCATIONS

MODEL	А	В	С	D
SVANGE6042DLRR	1-1/2	1-1/8	1-3/8	11-1/4




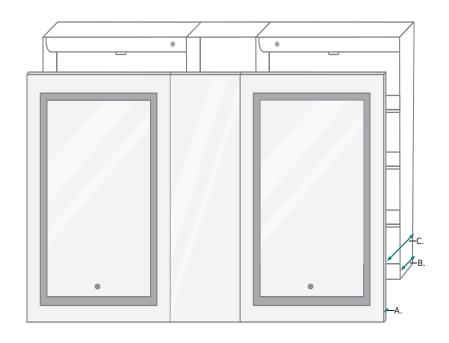



DOOR & CABINET

MODEL	А	В	С	D	E	F	G
SVANGE6042DLRR	7/8	3-7/8	4-3/4	18	3/8	5-1/4	11-1/4

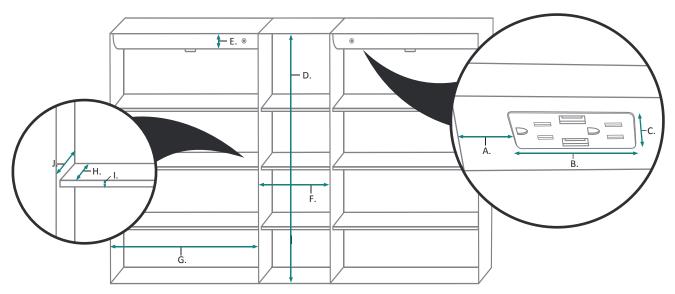

INTERIOR CABINET

MODEL	А	В	С	D	Е	F	G	Н	1	J
SVANGE6042DLRR	3-3/4	5-5/8	1-1/4	32-1/4	2-1/4	10-1/2	22-1/2	2-3/8	3/8	3-5/8